

# MARION COUNTY SURVEYOR'S OFFICE



## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 17 TWN. 17<sub>N</sub> RNG. 5<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 10-07-09  
Party Chief: Wilcoxen  
Crew: Finney  
Type of Marker: Survey Marker nail  
Method of Establishment: County: 7-8-97  
IN S.P.C. E Zone, NAD 83  
Name: 17051711

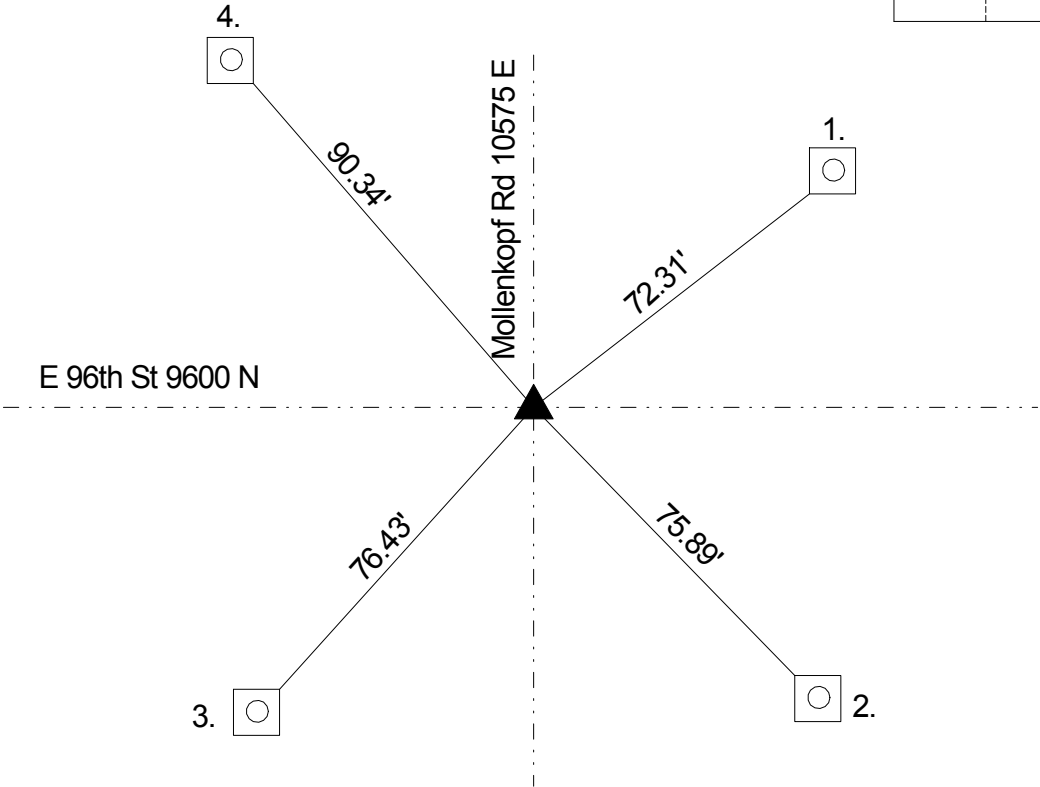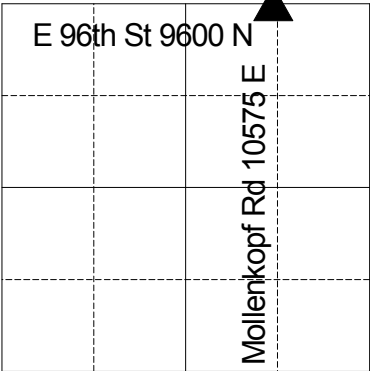

MCS on 7/8/1974 called a R.R. spike found over stone. Fortner on 5/20/75 called a R.R. spike over stone. On 5/30/75 P.I. Cripe set R.R. spike with cut x as per government inst. (1.35 south and 1.7 east of stone). Bruer on 8/6/79 called a R.R. spike over stone. Corner was excavated by Wilcoxen on 9/18/81 and a stone was found. A capped rebar was set above the stone. Wilcoxen on 2/26/82 called a capped rebar. Wilcoxen on 7/12/87 called a capped rebar over stone. Gries on 6/10/88 called a R.R. spike set over capped rebar. Wilcoxen on 7/8/1997 called a mag nail with washer set over R.R. spike over stone. Wilcoxen on 5/11/2002 called a survey marker nail set over R.R. spike over stone. Wilcoxen on 10/7/09 called a survey marker nail.

REF.	DISTANCE	DESCRIPTION
1.	72.31'	Mag nail w/Hamilton County washer SW corner concrete base for pole
2.	75.89'	Mag nail w/Hamilton County washer NW corner concrete base for pole
3.	76.43'	Mag nail w/Hamilton County washer NE corner concrete base for pole
4.	90.34'	Mag nail w/Hamilton County washer SE corner concrete base for pole

THIS CORNER POSITION  
REPRESENTS A "TITLE" CORNER  
AND MAY NOT NECESSARILY  
REPRESENT THE POSITION BASED  
ON RECORD CORNERS.